

Eco-Ridge 80MM

An oversized brick shape with a slightly textured riven surface. Slightly chamfered edges with a 13% open surface area. Joint opening which is compliant with the Americans with Disabilities Act. (ADA)



Environmental Pavers

- **OVERSIZED BRICK SHAPE**
- **SLIGHTLY CHAMFERED EDGES**
- **13% OPEN SURFACE AREA**
- **JOINT OPENING COMPLIANT WITH THE AMERICANS WITH DISABILITIES ACT (ADA)**



Granite City Blend



Eco-Ridge 80MM



	WIDTH	LENGTH	THICKNESS	SF/PALLET	PCS/PALLET	LBS/PALLET
A	4¾"	9½"	3⅞"	100	320	3,389



GRANITE CITY BLEND



OYSTER BLEND*

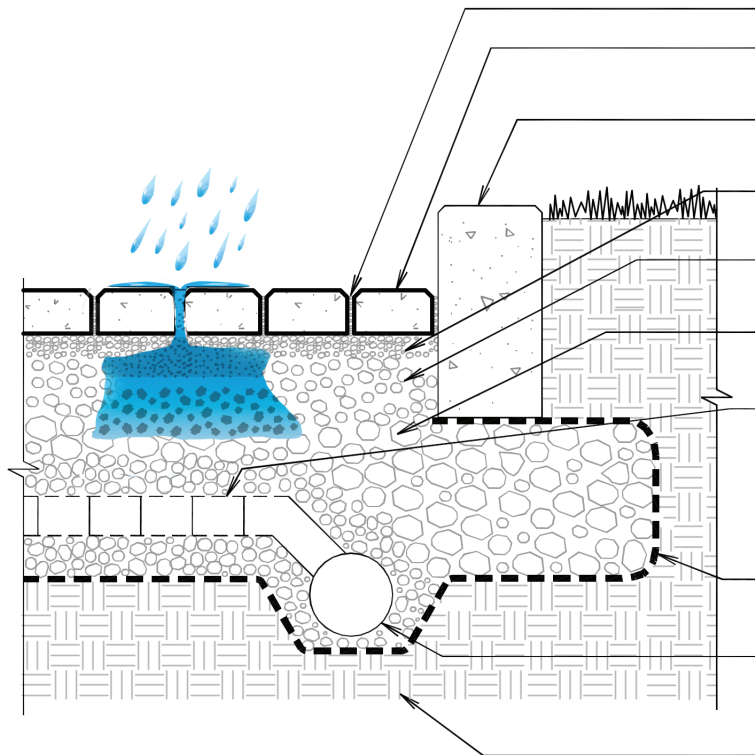

- # 8,89 OR 9 AGGREGATE IN OPENINGS
- NICOLOCK'S ECO-TRE PAVERS 31/8" (80mm) THICK FOR VEHICULAR TRAFFIC
- CURB/EDGE RESTRAINT WITH CUT-OUTS FOR OVERFLOW DRAINAGE (CURB SHOW)
- BEDDING COURSE 1 1/2" TO 2" (40 TO 50 mm) THICK (# 8 AGGREGATE)
- 4" (100mm) THICK # 57 STONE OPEN-GRADED BASE
- MIN. 6" (150mm) THICK # 2 STONE SUBBASE
- PERFORATED PIPE SPACED AND SLOPED TO DRAIN STORED WATER. EMBED PIPE IN # 57 STONE
- NONWOVEN GEOTEXTILE WHEN REQUIRED BY DESIGN ENGINEER
- NON-PERFORATED OUTFALL PIPE(S) SLOPED TO STORM SEWER OR STREAM. EMBED PIPE IN # 57 STONE
- SOIL SUBGRADE SLOPED TO DRAIN

DISCLAIMER: These typical details are provided for general information purposes only. Anyone making use of these details does so at their own risk and assumes all liability for such use. Site specific design should be performed by a licensed professional engineer who is familiar with actual site conditions, soil, other materials and local practices.

NOTES:

1. Subgrade must have adequate bearing capacity and be suitable for infiltration practices. Do not compact unless specified by design engineer.
2. Pavers, aggregate base and subbase must be properly compacted.
3. # 2 stone may be replaced with # 3 or # 4 stone.
4. Pavers shall be installed with a surface tolerance of $\pm 3/8$ " over 10ft with no paver lippage greater than $1/8$ "
5. Consult ICPI's current permeable pavement design manual for design and installation information.



Corporate HQ: 612 Muncy Avenue | Lindenhurst | NY | 11757 | 631.669.0700 | nicolock.com

