

DIAMOND PAVER



Nicolock's Diamond Paver provides you with a palette of contemporary design tools for your hardscape application. The unique diamond shape can be paired with Nicolock's 8x8 paver to create visual appeal in complementary and contrasting colors. Fuel your creativity with this flexible solution for residential applications (walkways, driveways, patios) as well as commercial applications (plazas, parks and sidewalks).

paver-shield™ pavers

paver-shield™ has a tight, smooth surface texture and will not expose heavy aggregate as it wears. Ultra-dense surface has more color and more protection. Nicolock has color from top to bottom throughout the paver ensuring a lifetime of beauty. Iron oxide pigments are **guaranteed not to fade!**



Diamond Paver | Color: Marble Blend and 8x8 Paver | Color: Charcoal



DIAMOND PAVER

WIDTH	LENGTH	THICKNESS	PCS / SF	SF / PALLET	PCS / PALLET	LBS / PALLET
5 $\frac{7}{16}$ "	13 $\frac{1}{8}$ "	2 $\frac{3}{8}$ "	2.48	96	192 full pcs 32 half pcs	2,750




Charcoal



Fire Island Blend



Granite City Blend



Marble Blend*




Red



*Premium color

Combine the Diamond Paver with our 8x8 Paver to make a unique design




WIDTH	LENGTH	THICKNESS	PCS / SF	SF / PALLET	PCS / PALLET	LBS / PALLET
8"	8"	2 $\frac{3}{8}$ "	2.25	106	240	3,724



8x8 colors available by special order only.

To calculate number of stones needed for total job:
3:1 Diamond Paver to 8x8

CROSS-SECTION OF TYPICAL INSTALLATION

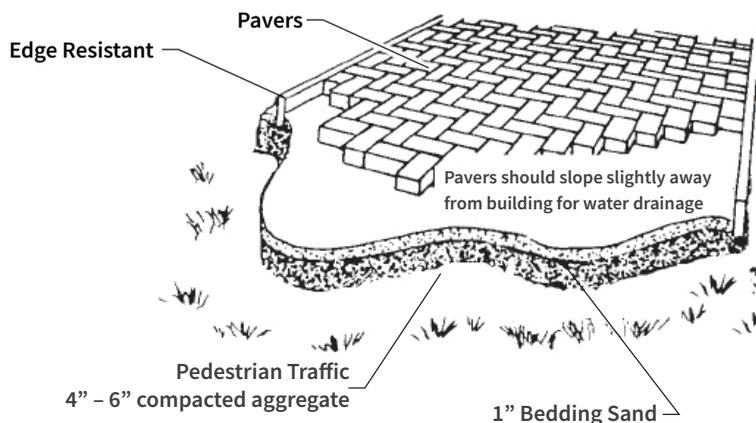

INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" - 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.

