

# OLD VIENNA WITH PAVER-SHIELD™

Now with paver-**shield**™ technology; this antique clay surface will bring a beautiful look and feel to borders, edging, inlays and anywhere you feel creative!



paver-**shield**™ pavers




Old Vienna with paver-**shield**™ | Color: Raven





# OLD VIENNA WITH PAVER-SHIELD™

SIZE	SF/PALLET	PCS/PALLET	SF/BAND	LBS/PALLET
2⅜" x 7½" x 2⅜"	55	425	5 layers	1,554



Autumn Blend\*



Brown



Fire Island Blend



Golden Brown Blend




Raven\*




Umber

\*Premium Colors

## CROSS-SECTION OF TYPICAL INSTALLATION

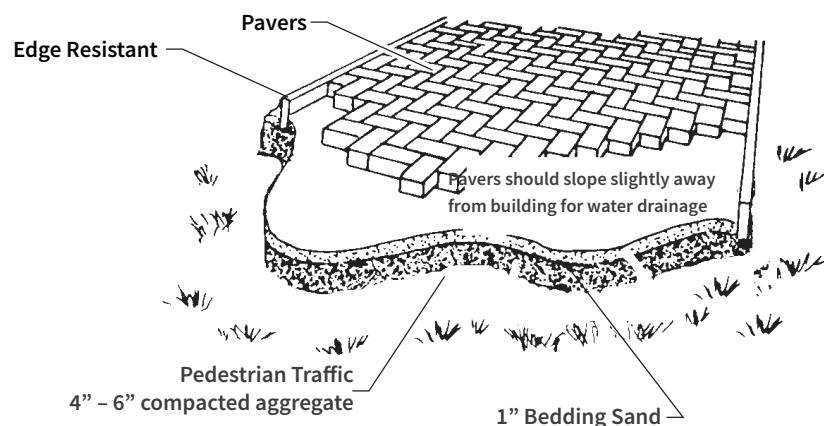

## NICOLOCK PAVING STONE 1"-3⅝" THICK

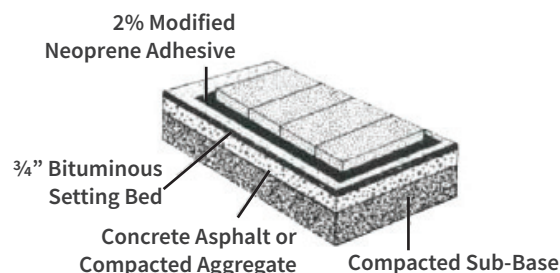

## INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" - 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

**NOTE:** All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

**CAUTION:** Always use a plate compactor with a pad when installing any textured paving stone.



Corporate HQ: 612 Muncy Avenue | Lindenhurst | NY | 11757 | 631.669.0700 | nicolock.com

