## **STONE RIDGE CONTEMPORARY**

PAVING STONES • RETAINING WALLS • OUTDOOR LIVING

paver-shield


\*\*The part of the part of

Multi-size rectangular shapes with a smooth and modern finish. Slightly chamfered edge.

paver-**shield™** pavers

paver-shield<sup>™</sup> has a tight, smooth surface texture and will not expose heavy aggregate as it wears. Ultra-dense surface has more color and more protection. Nicolock has color from top to bottom throughout the paver ensuring a lifetime of beauty. Iron oxide pigments are guaranteed not to fade!








## STONE RIDGE CONTEMPORARY

	WIDTH	LENGTH	THICKNESS	PCS / SF	SF / PALLET	PCS / PALLET	LBS / PALLET
Α	41/2"	9"	23/8"	3.8		130	
В	9"	9"	23/8"	1.9	110	60	2,950
С	9"	13½"	23/8"	1.3		50	
*D	18"	18"	2³/8"	2.25	131	60	3,537 *sold as separate pallet

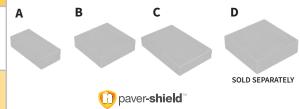

## TOP SELLERS: Chesapeake Granite City Graphite Pearl Oceanic Blue\* Pennsylvania South Bay Travertina\* Westchester Blue\*\* Blend\* Blend\* Blend Blend\* Blend



Blend

















Marble Blend\*







Oyster

Blend'




**INSTALLATION GUIDELINES: SAND** 

\*Premium Color \*\*Deluxe Color

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" - 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

## CROSS-SECTION OF TYPICAL INSTALLATION

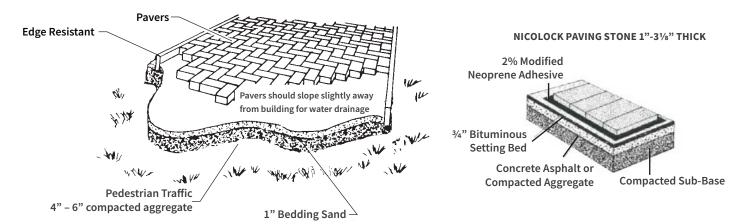

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.













